


KRD17 BIDIRECTIONAL VERTICAL SHOCK TEST SYSTEM

KRD17 series pneumatic bidirectional vertical shock test system is the novel designed and developed for large specimens that cannot or are not easy to turn over, especially adopt for battery testing. It can complete vertical upward and downward shock test in one test stand without moving the UUT.

- Pneumatic drive, no pollution to the environment
- One machine with multiple functions, one clamping, to complete the upward and downward shock and bump tests, with high efficiency
- Built-in pneumatic brake mechanism, safe and reliable
- One-machine management for control and measurement, convenient operation
- Air springs and dampers are used to reduce vibration, and free-foundation is optional

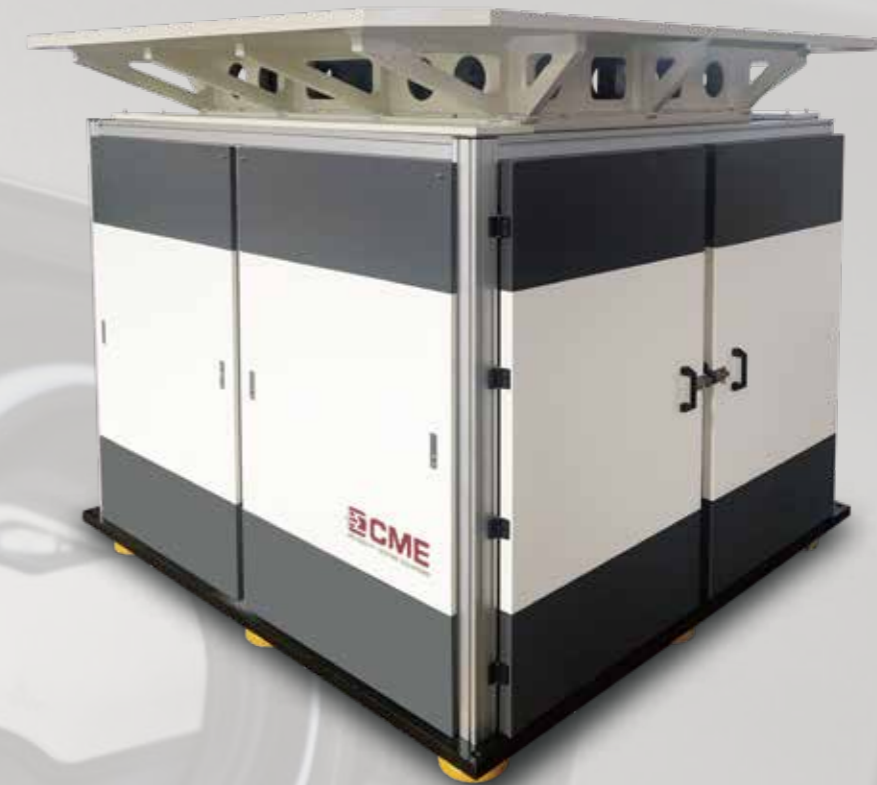

TECHNICAL SPECIFICATIONS

Parameters		Model	KRD17-50	KRD17-100	KRD17-200	KRD17-500	KRD17-800	KRD17-1000	KRD17-2000
Rated Load (kg)			50	100	200	500	800	1000	2000
Table Size (mm)			500x500	600x600	800x800	1000x1000	1200x1200	1500x1500	2000x2000
Shock Direction			Downward						
Peak Acc. (g)	Half-Sine		10~750	10~600	10~450	10~300	10~250	10~200	10~150
	Post-Peak Sawtooth		10~200	10~200	10~100	10~100	10~100	10~100	10~100
	Trapezoid		15~200	15~200	15~100	15~100	15~60	15~60	15~50
Pulse Duration (ms)	Half-Sine		1.5-60	2-60	2.5-60	4-60	4.5-60	5-60	6-60
	Post-Peak Sawtooth		3~18			6~18			
	Trapezoid		3~18		6~18				
Shock Direction			Upward						
Shock Waveform			Half Sine Wave						
Peak Acceleration (g)			15~350	15~300	15~200	15~150	15~100	15~100	15~75
Pulse Duration (ms)			3.5-60	3.5-60	4-60	4.5-40	5.5-60	5.5-60	6-60
Overall Dimension (mm)			1250x1250 x1600	1250x1250 x1600	1300x1300 x1700	1350x1350 x1750	1550x1550 x1750	1650x1650 x1850	2000x2000 x1900
Working Environment			Temperature range 0 ~ 40°C; Humidity ≤ 80%, non-condense						
Power			220VAC±10% 50Hz						
Air Source			≤1MPa						
Installation Condition			Foundation-free, the cement floor shall be leveled and the working distance of 800 ~ 1000mm shall be reserved around the equipment						
Weight (kg)			3000	3200	3400	4000	5000	6000	8000
Standards			MIL-STD-810F IEC68-2-27 UN38.3 IEC62281 IEC62133-2 UL2054 IEEE1625 SAEJ2929 IEC62660-2 ISO12405-3 UL2580						

Note: The parameters in the table are for reference only, and the parameters agreed upon by the supplier and the buyer shall prevail.